



Precision **WIG/TIG Schweißbrenner**
*Welding torches / Torches de soudage /
Antorchas de soldadura*

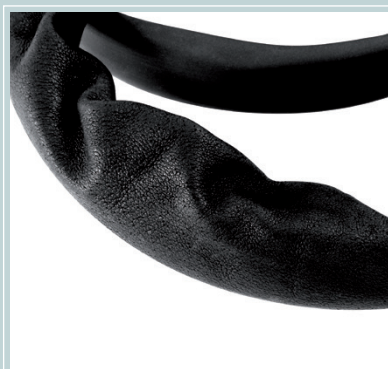

- Standard:** Gummi-Überzugschlauch
Option: Leder- oder Textil-Überzugschlauch
- Standard:** Rubber outer cover
Option: Leather or textile outer cover
- Standard:** Housse en caoutchouc
Option: Housse en cuir ou textile
- Estándar:** Funda de goma
Opción: Funda de cuero o textil

Precision

gasgekühlt / gas cooled / refroidissement par air / refrigeradas por aire

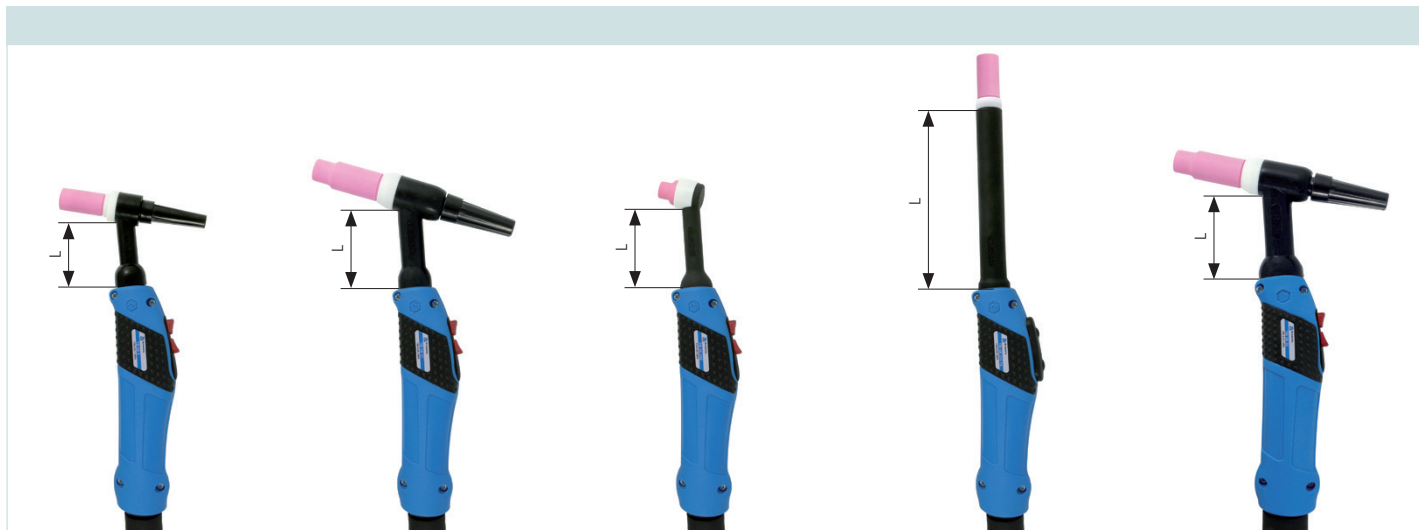

TBi SR 9 (FX)
TBi SR 9 V (FX)
 60% (10 min.)
 AC: 80 A
 DC: 110 A
 Ø 0.5-1.6 mm
 L = 35 mm
 (FX: 35 mm (Std.),
 115 mm)

TBi SR 17 (FX)
TBi SR 17 V (FX)
 60% (10 min.)
 AC: 100 A
 DC: 140 A
 Ø 0.5-2.4 mm
 L = 50 mm
 (FX: 50 mm)


TBi SR 24G
 60% (10 min.)
 AC: 80 A
 DC: 110 A
 Ø 0.5-1.6 mm
 L = 50 mm

TBi SR 25G FX
 60% (10 min.)
 AC: 80 A
 DC: 110 A
 Ø 0.5-2.4 mm
 FX: L = 120 mm

TBi SR 26 (FX)
TBi SR 26 V (FX)
 60% (10 min.)
 AC: 140 A
 DC: 200 A
 Ø 0.5-4.0 mm
 L = 50 mm
 (FX: 50 mm)

Precision

wassergekühlt / water cooled / refroidissement par eau / refrigeradas por agua

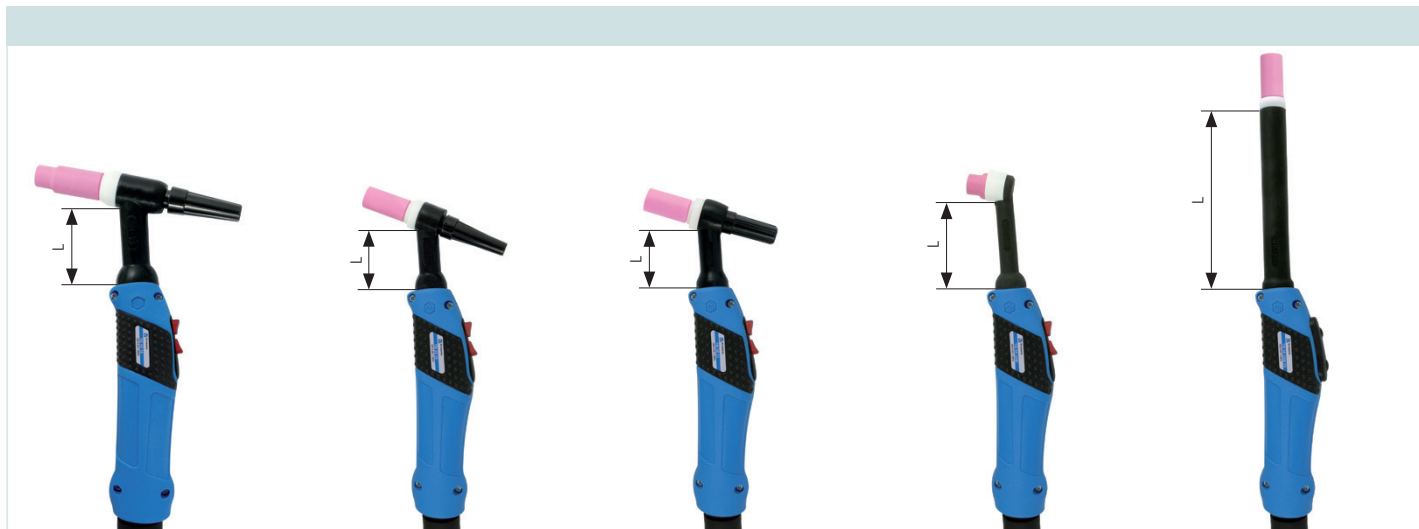

TBi SR 18 (FX)
TBi SR 18 V (FX)
 100% (10 min.)
 AC: 225 A
 DC: 320 A
 Ø 0.5-4.0 mm
 L = 50 mm
 (FX: 50 mm)

TBi SR 20 (FX)
TBi SR 20 V (FX)
 100% (10 min.)
 AC: 160 A
 DC: 220 A
 Ø 0.5-3.2 mm
 L = 35 mm
 (FX: 35 mm (Std.),
 70, 90, 115 mm)

TBi SR 21 (FX)
 100% (10 min.)
 AC: 240 A
 DC: 340 A
 Ø 0.5-3.2 mm
 L = 35 mm
 (FX: 65 mm (Std.),
 115 mm)

TBi SR 24W (FX)
 100% (10 min.)
 AC: 100 A
 DC: 140 A
 Ø 0.5-2.4 mm
 L = 50 mm
 (FX: 65 mm (Std.),
 90, 115, 290 mm)

TBi SR 25W FX
 100% (10 min.)
 AC: 100 A
 DC: 140 A
 Ø 0.5-3.2 mm
 FX: L = 120 mm (Std.),
 300 mm)

Module / Modules / Les modules / Módulos




A Doppeltaster (Ausführung abhängig vom Brennermodell)
*Double function switch (style depends on torch model) /
 Double bouton (version dépendant du modèle de torche) /
 Pulsador doble (el tipo depende del modelo de antorcha)*

B Doppeltaster mit Poti, 10 kΩ
*Double function switch with poti, 10 kΩ /
 Double bouton et potentiomètre, 10 kΩ /
 Pulsador doble y potenciómetro, 10 kΩ*

C Doppelhebel
Dual levers / Double levier / Manetas dobles




TBi SR 20

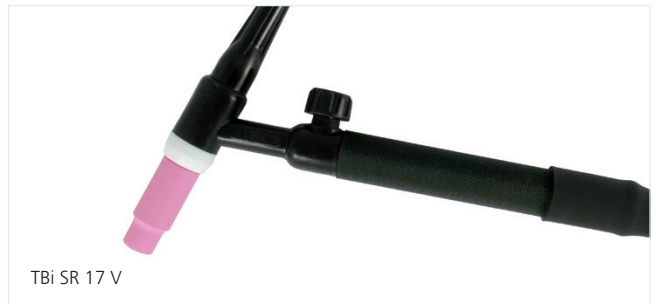

TBi SR 17 V

TBi Kaltdrahtsystem / TBi cold wire supply / TBi aménagement de fil froid / TBi alimentación de hilo frío

Brenner mit Ventil / Torch with valve / Torche à valve / Antorcha con válvula

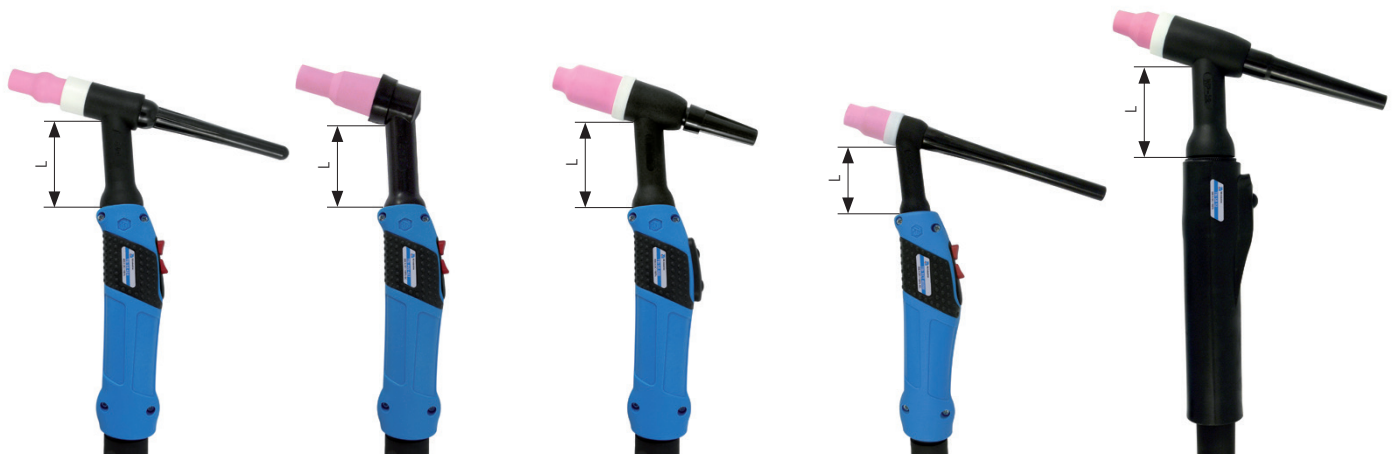

TBi AW 424

100% (10 min.)
 AC: 280 A
 DC: 400 A
 Ø 1.0-4.0 mm
 L = 55 mm

TBi AW 427

100% (10 min.)
 AC: 350 A
 DC: 500 A
 Ø 2.4-8.0 mm
 L = 55 mm

TBi SR 400

100% (10 min.)
 AC: 315 A
 DC: 450 A
 Ø 1.0-4.8 mm
 L = 50 mm

TBi XCT 400W

100% (10 min.)
 AC: 315 A
 DC: 450 A
 Ø 2.4-4.0 mm
 L = 52 mm

TBi SR 12

100% (10 min.)
 AC: 350 A
 DC: 500 A
 Ø 2.4-6.4 mm
 L = 60 mm



WELDING COMPANY

Welding Company België
Brandekensweg 6 | 2627 Schelle
Tel.: +32 3 880 81 80
info@weldingcompany.be

Welding Company Nederland
Ambachtsweg 2 | 4128 LC Lexmond
Tel.: +31 3 347 745008
info@weldingcompany.nl


Ready for Tomorrow.

Alle gängigen Maschinenanschlüsse lieferbar

Torch connections for all types of welding machines / Connecteurs torches pour tous les postes à souder / Conexiones para todos los tipos de máquinas de soldadura

Gasgekühlt

Gas cooled / Refroidissement par air / Refrigeradas por aire

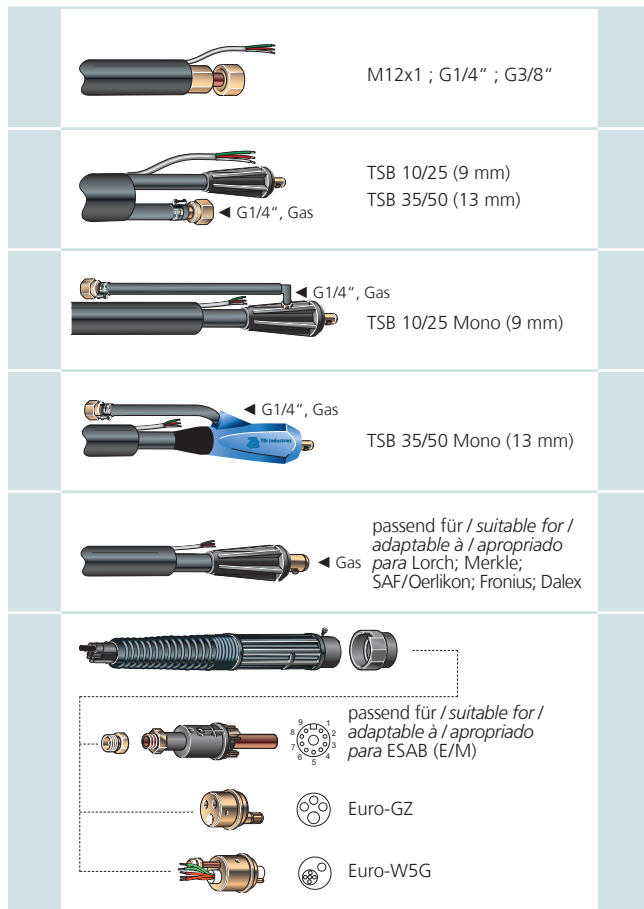

Wassergekühlt

Water cooled / Refroidissement par eau / Refrigeradas por agua

